



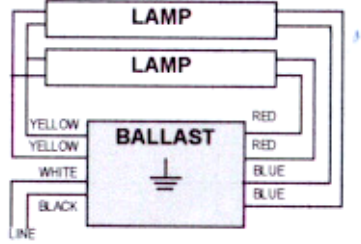


Catalog No. 296HOTPH	
Ballast Type	Magnetic
Starting Method	Rapid Start
Input Voltage	120 V.
Input Frequency	60 Hz.
Min. Start Temp.	50° F
Remarks	Energy Saving, Class P, Type 1, Outdoor, No PCB's, Sound Rated "A"

Lamp Watts	Lamp Type	No. of Lamps	Input Current	Input Watts	Power Factor	THD %	Ballast Factor
85	F72T12	2	1.85	207	>0.90	<20	0.94
96	F96T12	2	1.95	220	>0.92	<20	0.93
110	F96T12	2	2.2	260	>0.95	<10	0.95

Ballast Dimensions	Standard Lead Lengths																		
 <table border="1" data-bbox="609 1075 917 1201"> <tr> <td>Width (W)</td> <td>3.15"</td> </tr> <tr> <td>Height (H)</td> <td>2.5"</td> </tr> <tr> <td>Mounting (M)</td> <td>11.00"</td> </tr> <tr> <td>Length (L)</td> <td>11.7"</td> </tr> </table>	Width (W)	3.15"	Height (H)	2.5"	Mounting (M)	11.00"	Length (L)	11.7"	<table border="1" data-bbox="1031 991 1299 1150"> <tr> <td>Red</td> <td>48" x 48"</td> </tr> <tr> <td>Yellow</td> <td>72" x 72"</td> </tr> <tr> <td>Blue</td> <td>48" x 48"</td> </tr> <tr> <td>White</td> <td>22"</td> </tr> <tr> <td>Black</td> <td>22"</td> </tr> </table>	Red	48" x 48"	Yellow	72" x 72"	Blue	48" x 48"	White	22"	Black	22"
Width (W)	3.15"																		
Height (H)	2.5"																		
Mounting (M)	11.00"																		
Length (L)	11.7"																		
Red	48" x 48"																		
Yellow	72" x 72"																		
Blue	48" x 48"																		
White	22"																		
Black	22"																		

Wiring Diagram	Approvals
	

KEYSTONE TECHNOLOGIES LLC.
P.O. Box 246, AMBLER, PENNSYLVANIA 19002
PHONE: 215-283-2600
FAX: 215-628-4412
INFO@KEYSTONEBALLAST.COM
WWW.KEYSTONEBALLAST.COM