



KTEB-275-UV-TP-PIC	
Ballast Type	Electronic
Starting Method	Instant Start
Lamp Connection	Parallel
Input Voltage	120 ~ 277Vac ± 10%
Input Frequency	60Hz / 50Hz

ELECTRICAL SPECIFICATIONS:

Lamp Type	No. of Lamp	Volts	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
F96T12 75W	2	120	133	1.12	0.99	<1.7	0.88	0.66	10
		277	133	0.48	0.99	<1.7	0.88	0.66	10
	1	120	82	0.68	0.99	<1.7	1.05	1.28	10
		277	82	0.31	0.97	<1.7	1.05	1.28	10
F96T12/ES 60W	2	120	117	0.98	0.99	<1.7	0.88	0.75	10
		277	117	0.42	0.98	<1.7	0.88	0.75	10
	1	120	72	0.60	0.99	<1.7	1.05	1.46	10
		277	72	0.27	0.96	<1.7	1.05	1.46	10
F72T12 57W	2	120	107	0.92	0.99	<1.7	0.90	0.84	10
		277	107	0.40	0.95	<1.7	0.90	0.84	10
	1	120	67	0.60	0.99	<1.7	1.05	1.57	10
		277	67	0.26	0.95	<1.7	1.05	1.57	10
F48T12 40W	2	120	76	0.68	0.99	<1.7	0.92	1.21	10
		277	76	0.30	0.95	<1.7	0.92	1.21	10
F48T12/ES 30W	2	120	64	0.60	0.99	<1.7	0.92	1.44	10
		277	64	0.26	0.95	<1.7	0.92	1.44	10

PERFORMANCE:

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection meets ANSI/IEEE C62.41 Cat. A
- Ballast frequency for all listed lamps: 20KHz-33KHz
- 3-Year Warranty


APPROVALS:

- UL, cUL 935 Listed

PHYSICAL DIMENSIONS:

Length (L):	11.0"
Width (W):	3.15"
Height (H):	1.85"
Mounting(M):	11.7"
Lead Length:	
White, Black	25"
Blue	60"
Red	60"

WIRING DIAGRAM:

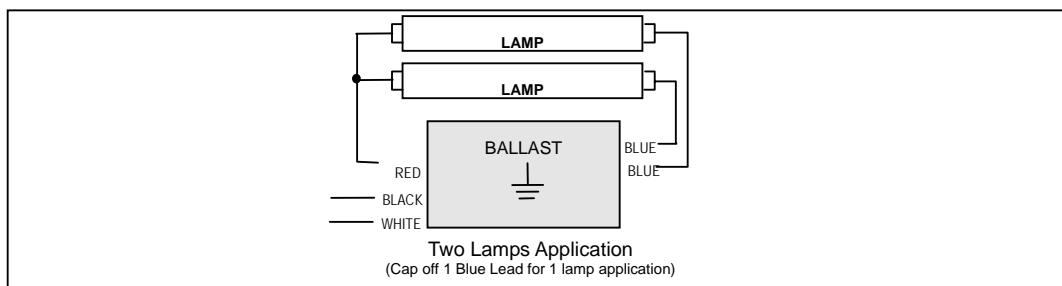

KEYSTONE TECHNOLOGIES LLC.
P.O. Box 246, AMBLER, PENNSYLVANIA 19002
PHONE: 215-283-2600
FAX: 215-628-4412
INFO@KEYSTONEBALLAST.COM
WWW.KEYSTONEBALLAST.COM