





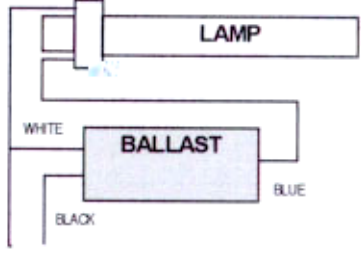

Catalog No. 113SHTP	
Ballast Type	Magnetic
Starting Method	Preheat
Input Voltage	120 V.
Input Frequency	60 Hz.
Min. Start Temp.	50° F
Remarks	Class P, Type 1, Outdoor, No PCB's, Sound Rated "A"

Lamp Watts	Lamp Type	No. of Lamps	Input Current	Input Watts	Power Factor	THD %	Ballast Factor
13	CFT13W/GX23, CFQ13W/GX23	1	0.13	15	>0.90	<10	0.88

Ballast Dimensions	Standard Lead Lengths																		
 <table border="1" data-bbox="630 940 914 1066"> <tr> <td>Width (W)</td> <td>1.89"</td> </tr> <tr> <td>Height (H)</td> <td>1.43"</td> </tr> <tr> <td>Mounting (M)</td> <td>2.75"</td> </tr> <tr> <td>Length (L)</td> <td>3.10"</td> </tr> </table>	Width (W)	1.89"	Height (H)	1.43"	Mounting (M)	2.75"	Length (L)	3.10"	<table border="1" data-bbox="1031 919 1295 1077"> <tr> <td>Red</td> <td>-</td> </tr> <tr> <td>Yellow</td> <td>-</td> </tr> <tr> <td>Blue</td> <td>12"</td> </tr> <tr> <td>White</td> <td>12"</td> </tr> <tr> <td>Black</td> <td>12"</td> </tr> </table>	Red	-	Yellow	-	Blue	12"	White	12"	Black	12"
Width (W)	1.89"																		
Height (H)	1.43"																		
Mounting (M)	2.75"																		
Length (L)	3.10"																		
Red	-																		
Yellow	-																		
Blue	12"																		
White	12"																		
Black	12"																		

Wiring Diagram	Approvals
	  <p>For Use in Qualified Fixtures</p>

KEYSTONE TECHNOLOGIES LLC.
P.O. Box 246, AMBLER, PENNSYLVANIA 19002
PHONE: 215-283-2600
FAX: 215-628-4412
INFO@KEYSTONEBALLAST.COM
WWW.KEYSTONEBALLAST.COM