



<b>KTEB-218-UV-TP-PIC-DW</b>	
Ballast Type	Electronic
Starting Method	Rapid Start
Lamp Connection	Series
Input Voltage	120 ~ 277Vac ± 10%
Input Frequency	60Hz / 50Hz

**ELECTRICAL SPECIFICATIONS:**

Lamp Type	No. of Lamp	Volts	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
CFQ18WG24q	2	120	43.0	0.36	0.99	1.53	1.0	2.33	10
		277	43.0	0.16	0.98	1.53	1.0	2.33	10
	1	120	25.0	0.21	0.99	1.60	1.25	5.00	12
		277	25.0	0.10	0.96	1.60	1.25	5.00	12
CFTR18W/GX24q	2	120	43.0	0.36	0.99	1.53	1.0	2.33	10
		277	43.0	0.16	0.98	1.53	1.0	2.33	10
	1	120	25.0	0.21	0.99	1.60	1.25	5.00	12
		277	25.0	0.10	0.96	1.60	1.25	5.00	12
CFQ26W/G24q	1	120	28.0	0.24	0.99	1.56	1.0	3.57	12
		277	28.0	0.10	0.96	1.56	1.0	3.57	12
CFTR26W/GX24q	1	120	28.0	0.24	0.99	1.56	1.0	3.57	12
		277	28.0	0.10	0.96	1.56	1.0	3.57	12
CFS21W/GR10q	1	120	24.0	0.20	0.99	1.59	1.05	4.38	12
		277	24.0	0.09	0.96	1.59	1.05	4.38	12
CFS28W/GR10q	1	120	31.0	0.26	0.99	1.52	1.0	3.23	10
		277	31.0	0.11	0.97	1.52	1.0	3.23	10

**PERFORMANCE:**

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection meets ANSI/IEEE C62.41 Cat. A
- Ballast frequency for all listed lamps: 20KHz-30KHz,
- Lamp end-of-life protected



**APPROVALS:**

- UL, cUL 935 listed


**PHYSICAL DIMENSIONS:**

<p>Length (L): 5.00" Width (W): 2.40" Height (H): 1.00" Mounting (M): 4.63"</p> <p><b>Options:</b> also available versions</p> <ul style="list-style-type: none"> <li>- without studs</li> <li>- with lead wires</li> </ul>	
---	--

**WIRING DIAGRAM:**

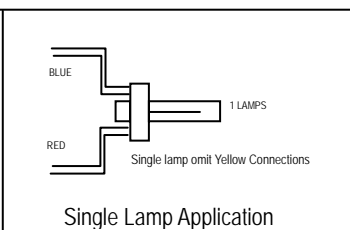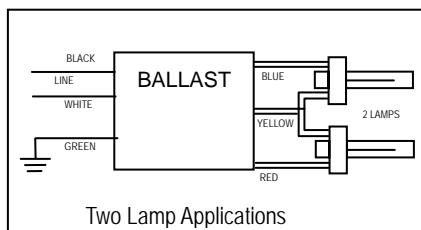

**HOT SPOT LOCATION:**

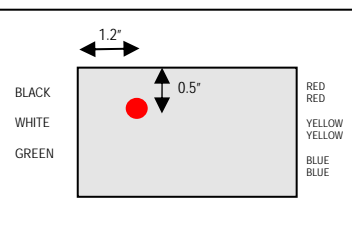

**KEYSTONE TECHNOLOGIES LLC.**  
P.O. Box 246, AMBLER, PENNSYLVANIA 19002  
PHONE: 215-283-2600  
FAX: 215-628-4412  
INFO@KEYSTONEBALLAST.COM  
WWW.KEYSTONEBALLAST.COM