



<b>KTEB-226-UV-TP-PIC-DW</b>	
Ballast Type	Electronic
Starting Method	Rapid Start
Lamp Connection	Series
Input Voltage	120 ~ 277Vac ± 10%
Input Frequency	60Hz / 50Hz

**ELECTRICAL SPECIFICATIONS:**

Lamp Type	No. of Lamp	Volts	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
CFQ26W/G24q	2	120	53.0	0.45	0.99	1.57	0.95	1.79	10
		277	53.0	0.20	0.98	1.57	0.95	1.79	10
	1	120	33.0	0.27	0.99	1.58	1.10	3.33	12
		277	33.0	0.12	0.96	1.58	1.10	3.33	12
CFTR26W/GX24q	2	120	53.0	0.45	0.99	1.57	0.95	1.79	10
		277	53.0	0.20	0.98	1.57	0.95	1.79	10
	1	120	33.0	0.27	0.99	1.58	1.10	3.33	12
		277	33.0	0.12	0.96	1.58	1.10	3.33	12
F24T5 HO	2	120	51.0	0.44	0.99	1.47	1.0	1.96	10
		277	51.0	0.19	0.98	1.47	1.0	1.96	10
CFTR32W/GX24q	1	120	41.0	0.35	0.99	1.53	1.2	2.93	10
		277	41.0	0.16	0.96	1.53	1.2	2.93	10
CFTR42W/GX24q	1	120	49.0	0.42	0.99	1.48	1.1	2.24	10
		277	49.0	0.19	0.97	1.48	1.1	2.24	10
FC16T9	1	120	43.0	0.36	0.99	1.46	1.0	2.33	10
		277	43.0	0.16	0.97	1.46	1.0	2.33	10

**PERFORMANCE:**

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection meets ANSI/IEEE C62.41 Cat. A
- Ballast frequency for all listed lamps: 20KHz-33KHz,
- Lamp end-of-life protected



**APPROVALS:**

- UL, cUL 935 listed


**PHYSICAL DIMENSIONS:**

Length (L):	5.00"	
Width (W):	2.40"	
Height (H):	1.00"	
Mounting (M):	4.63"	
<p><b>Options:</b> also available versions</p> <ul style="list-style-type: none"> <li>- without studs</li> <li>- with lead wires</li> </ul>		

**WIRING DIAGRAM:**

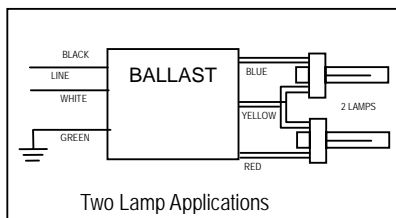

**HOT SPOT LOCATION:**



**KEYSTONE TECHNOLOGIES LLC.**  
P.O. Box 246, AMBLER, PENNSYLVANIA 19002  
PHONE: 215-283-2600  
FAX: 215-628-4412  
INFO@KEYSTONEBALLAST.COM  
WWW.KEYSTONEBALLAST.COM