



KTEB-132LBF-UV-TP-PIC	
Ballast Type	Electronic
Starting Method	Instant Start
Lamp Connection	--
Input Voltage	120 ~ 277Vac ± 10%
Input Frequency	60Hz / 50Hz

ELECTRICAL SPECIFICATIONS:

Lamp Type	No. of Lamp	Volts	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
F32T8	1	120	30	0.25	0.99	1.44	0.88	2.93	10
		277	30	0.11	0.99	1.44	0.88	2.93	10
F25T8	1	120	24	0.20	0.99	1.44	0.88	3.67	10
		277	24	0.09	0.99	1.44	0.88	3.67	10
F17T8	1	120	18	0.15	0.99	1.42	0.88	4.89	10
		277	18	0.07	0.98	1.42	0.88	4.89	10

PERFORMANCE:

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection meets ANSI/IEEE C62.41 Cat. A
- Ballast frequency for all listed lamps: 20KHz-33KHz


APPROVALS:

- UL, cUL 935 listed

PHYSICAL DIMENSIONS:

Length (L):	9.50"	
Width (W):	1.38"	
Height (H):	1.18"	
Mounting (M):	8.90"	
Lead Length:		
White, Black	25"	
Blue	31"	
Red	37"	

WIRING DIAGRAM:

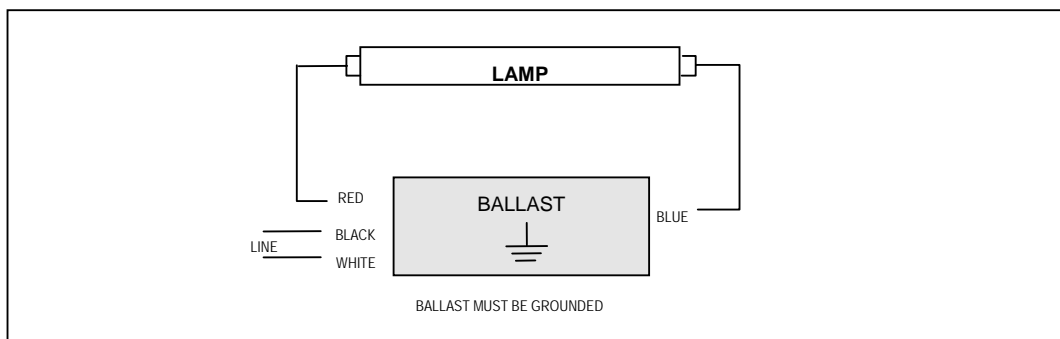

KEYSTONE TECHNOLOGIES LLC.
P.O. Box 246, AMBLER, PENNSYLVANIA 19002
PHONE: 215-283-2600
FAX: 215-628-4412
INFO@KEYSTONEBALLAST.COM
WWW.KEYSTONEBALLAST.COM