





Catalog #	MH-400A-P-HP
Type:	400W Metal Halide
Voltage:	5 Tap (120/208/240/277/480)

General Information

Lamp Type	400W MH
ANSI Designation	M59 or H33
Line Voltage (V)	120/208/240/277/480
Regulation	10%
Frequency (Hz)	60
Recommended Fuse (A)	10/8/5/5/5
Circuit Type	CWA
Insulation Class	180°C
Capacitor Value	24 MF
Capacitor Voltage Rating	400 V
Cap. Temp. Rating	90°C
Winding Materials (Pri/Sec)	Cu/Cu
Lamp Starter	N/A
Agency Certification	RU, cRU
Maximum Distance to Lamp	N/A

Wiring Diagram

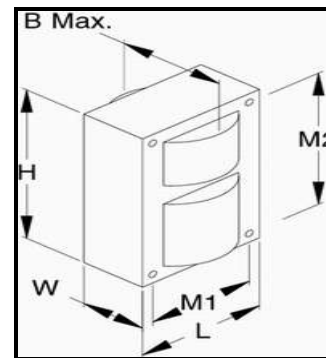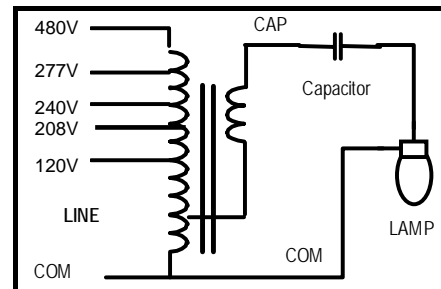

Electrical Characteristics

Line Volt (V)	Power Factor	Line Current (A)			Input Power (W)	Open Circuit Voltage (V)	Min Start Temp.	UL Temp. Code
		Operating	Open	Start				
120	High	4.00	3.85	2.50	430	300	-30°C	A
208	High	2.20	2.23	1.40	430	300	-30°C	A
240	High	1.90	1.96	1.20	430	300	-30°C	A
277	High	1.70	1.70	1.00	430	300	-30°C	A
480	High	1.00	0.98	0.60	430	300	-30°C	A

Physical Characteristics

Overall Dimensions (Inches)				Mounting Holes (Inches)			Bracket Dimension (Inches)		Ballast Net Weight (KG)	Lead Length (Inches)
Length	Width	Height	B max.	Diameter	M1	M2	Length	Width		
4.30	2.19	4.80	4.13	0.25	3.87	4.38	7.25	1.11	6.1	12-14

KEYSTONE TECHNOLOGIES LLC.
P.O. Box 246, AMBLER, PENNSYLVANIA 19002
PHONE: 215-283-2600
FAX: 215-628-4412
INFO@KEYSTONEBALLAST.COM
WWW.KEYSTONEBALLAST.COM